

ADDENDUM:

2

TODAY'S DATE:

03.02.22

PROJECT NAME: KING'S COURT SITE IMPROVEMENTS

CONTACT / TITLE: AMY KURTZ

PROJECT MANAGER

PHONE / EMAIL: 206-574-1283

amyk@kcha.org

This Addendum is used to Identify Items in the Original Documents with Action as Follows:

BID

RFQ

RFP

CLARIFY

CHANGE

DELETE

ADD

SUBSTITUTE

3 Page(s) Total for this Addenda including this page.


Contractors Questions:

1. Can you clarify the height of the wheel stops? Specs call for 5" but standard heights are 3", 4", and 6".

Answer: Change wheel stop detail noted on page D01 from 5" to 6".

2. (Can you clarify) Additionally the removal of curbs on left hand side of the complex (in front of building A)

Answer: Please refer to attached drawing C02 for areas of demo and drawing C03 for replacement of curbing and asphalt areas. Refer to cover page for legend colors on drawings.

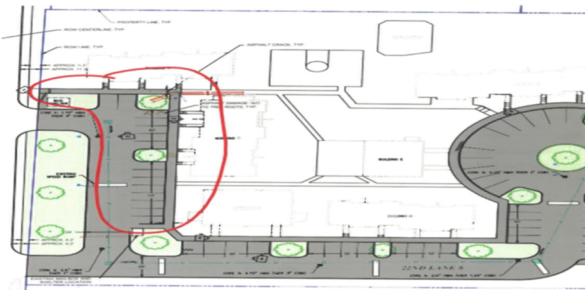

CHANGE: Scope of work:

**SECTION 001010
SCOPE OF WORK**

1.0 PROJECT SUMMARY

King's Court Site Improvements project will include removing and replacing selected walkways, extruded curb, wheel stops, and speed bumps; selective grinding, removal of asphalt, sub-base, and export necessary to complete subgrade compaction up to 6".

~~New vertical curbing~~ **To read: New Vertical Curbing** will include removing and disposal of existing asphalt, landscape, and soils necessary to install and construct all ~~extruded curbing~~ **vertical curbing** per plan page ~~D01~~ **C02 (Demolition plans) and plan page C03(Proposed site plan), Keynote site work #2 detail 203/D01**. The Contractor will adjust existing utility lids and catch basin grates or lids to match the new parking lot grade. Refer to plan detail on D02 for requirements.

END OF ADDENDA # 2